


H-1521 Operation Manual



A. Features

- 13 Digits, Hour, Minutes, Seconds, Month, Day and Week
- Daily Alarm Chime hourly and Snooze Function
- 12 / 24H format selectable, Auto Calendar
- 1/100 second Chronograph with split functions
- Count Down (Upper limit : 24H)
- Dual Time
- EL backlight

B. Operational Manual

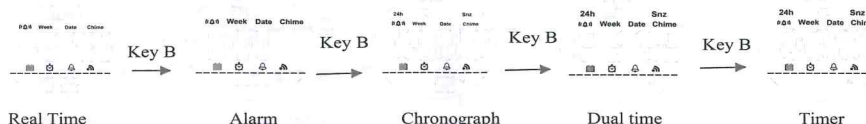


1. At any state, press A key EL backlight for 3s.

2. Real Time

➤ Time Setting

- a) Press and hold C key for 2s to time setting state and "Second" flashing, press D key to zero; Press B key to select item as following sequence :



- b) Press D key to adjust the flashing item,

- c) Press C key to return to Real Time Mode.

d) Press D key while the seconds are in the range of 30 to 59 resets them to 00 and adds 1 to the minutes. In the range of 00 to 59 resets them to 00 and adds to the minutes. In the range of 00 to 29, the minutes are unchanged.

e) 12/24-Hour format : In the timekeeping Mode, Use D to toggle between 12-hour (12H) and 24-hour (24H) timekeeping.

3. Daily Alarm

In Real Time Mode, press B key enter into Alarm Mode

Press C key to turn on/off Alarm (A) and Snooze(Snz)

➤ Alarm setting

- Press and hold C key for 2s to select "Hour" setting ; Press B key to select "Minute" setting; Press D key to adjust the flashing item.

Hour → Minute

4. Chronograph

In Real Time Mode , press B key twice enter into Chronograph Mode

- Press D key to Start/Stop running ; When stop, press C key to zero.

- When running ,press C key to split Counting. Then press D key to exit split count ,and stop counting ; When exit split count ,press C key to zero.

5. Dual Time

➤ Dual Time setting

In Real Time mode , Press B key 3 times to enter Dual Time Mode, Press and hold C key for 2s to select " Hour " setting, Press B key to select " Minute " setting, Press D key to adjust the flashing item, Press C key again to finish setting ,and return to Dual Time displaying mode .

6. Timer Mode

- In Real Time Mode, press B key four times enter into Timer mode

- Press D key to Start/Stop countdown

- When stop the countdown, press C key back to the first setting time

- Timer alarm sounds for about 10s when counting down to 0:00:00. The timer is automatically reset to its starting value after the alarm stops.

- Press C key 2s enter into countdown time setting

- a) Press B key to adjust "Hour" and then "Minute"

Hour → Minute

- b) Press D key to adjust the flashing item

- c) Press C key to confirm